

Your partner:

EN 1/2

Stand 11/2023

Enquiry Order

Reference no. (Customer)

Customer no.:	<input type="text"/>	Order address:	<input type="text"/>
Customer:	<input type="text"/>		<input type="text"/>
Contact person:	<input type="text"/>	Delivery address:	<input type="text"/>
Telephone:	<input type="text"/>		<input type="text"/>
E-mail:	<input type="text"/>	Requested delivery date:	<input type="text"/>

Edscha TS CS-Hybrid Roof


Basic roof components

DB-design (see page 12) reinforced according to EN 283
Suitable for intermodal transport and tested by Deutsche Bahn German Railways


E-Drive ¹⁾ design (see page 12)

Ice-free version
 Bows with roof pitch
 Eligible if applicable 1.3
 De-minimis (EU aid scheme)


Quantity of roofs with identical parameters **Piece**
 Roof length: m




CS-Hybrid * Standard




CS-Hybrid * Volumen



CS-Hybrid * Universal



CS-Hybrid * Universal Classic



CS-Hybrid * Small

Standard body width:

- 2550 mm
 2570 mm

Discrepant width,
 Special issue

mm

Standard End Carriage with automatic adjustment mechanism (for all Hybrid-Profiles):

- with locking assembly 1 x 700 N per side
 without locking 1 x 1000 N per side (for gantry beam >30 kg - < 50 kg)

End Carriage E-Drive with automatic adjustment mechanism (not for the profile "CS-Hybrid Small"):

- 1 x 700 N per side 1 x 1000 N per side (for gantry beam >30 kg - < 50 kg)

End Carriage Small with automatic adjustment mechanism 1 x 700 N per side (for all Hybrid-Profiles):

- with locking assembly without locking assembly

* Standard version in accordance with the current product description. Aluminium roof profiles are not included in the scope of delivery.

Necessary construction components for rear

CS-Hybrid without rear end

Gantry beams (see page 14)


- Gantry beam **Standard** (H: 130 mm)
 Gantry Beam **Volumen** (H: 190 mm)
 only available in combination with Standard end carriage

Rear end adapter
 including screws and screw nuts (see page 14)

End bow
 (see page 14)

TailWing (see page 16)

- TailWing CS (400-900) TailWing CS (901-1200)

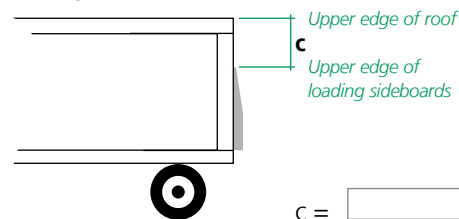

c =

Construction Kit TailWing ≤2600 mm (see page 16)

- TailWing CS (400-900) TailWing CS (901-1200)

©All rights are held by European Trailer Systems GmbH, including those for patent applications. All powers of disposal, such as copying and dissemination rights, are held by us. Please note the copyright notice according to DIN ISO 16016!

Assembly kit (see page 14) incl. clamping strips

- Assembly kit CS-Standard/Small front rear
- Assembly kit CS-Volume front rear
- Assembly kit CS-Universal front rear
- Assembly kit CS-Universal Classic front rear

Clamping strips (see page 14)

- Clamping strip kit (Standard/Volume/Universal/Small) front
- Clamping strip kit (Standard/Universal/Small) rear
- Clamping strip kit (Universal Classic) front & rear
- Clamping strip kit (Volume) rear

Optional construction components Components are in reference to standard body width 2550 mm

Both-sided movable End Carriage front (see page 18)

- Standard End Carriage** with automatic adjustment mechanism (for all Hybrid-Profiles):
- with locking assembly 1 x 700 N per side
 - without locking 1 x 1000 N per side (for gantry beam >30 kg - < 50 kg)

- End Carriage Small** with automatic adjustment mechanism 1 x 700 N per side (for all Hybrid-Profiles):
- with locking assembly without locking assembly

CS-Hybrid without rear end

Gantry beam / End bow front (1/2)

- Gantry beam 130 mm for standard width 2550 / 2570 (additional locking necessary)
- End bow (additional locking necessary)

Gantry beam / End bow front (2/2)

- Cable-locking mechanism for clearance on both sides
- Rear end adapter including screws and screw nuts
- Front frame top** (see page 18)

XL-design according to EN 12642 XL (see page 20)

- Roof reinforcement CS-Hybrid 4-belt
- Roof reinforcement CS-Hybrid 8-belt
- TIR** (see page 20)

Roof tarpaulin (see page 16) ¹⁾

- Roof tarpaulin, recyclable (width = 2550 mm)
- Roof tarpaulin, recyclable (other dimensions)

Optional accessories (see page 22)

**** Attention!** Not suitable for Profile "Universal Classic"

Side tarpaulin roller CS-Hybrid **

- Side tarpaulin roller with clip Pcs.
- Side tarpaulin roller without clip Pcs.
- Side tarpaulin roller SPR-4 Pcs.
- Tarpaulin deflector plate (kit) Pcs.

Side tarpaulin roller CS-Hybrid Universal Classic

- Side tarpaulin roller (1) Pcs.
- Belt roller Pcs.
- Side tarpaulin roller (2) Pcs.

Stanchion roller carrier

- Stanchion roller carrier ** Pcs.
Vol./STD./Univ. (a)
- Stanchion roller carriage rotatable (b) Pcs.
- Stanchion roller carrier (c) Pcs.
(to be used with curtain roller 40 38 031 360 only)

- Roller with flap (d) Pcs.
- Stanchion roller carrier (e) Pcs.
- Stanchion roller carrier (f) Pcs.
- Stanchion roller carrier (g) Pcs.

Profile seal

Standard/Universal/Small

- grey black
- Roll
- 13700 x 125 mm Pcs.
- 18500 x 125 mm Pcs.

Volume

- grey black
- Roll
- 13700 x 110 mm Pcs.
- 18500 x 110 mm Pcs.

Universal Classic

- grey black
- Roll
- 14000 x 120 mm Pcs.
- 33000 x 120 mm Pcs.
- 33000 x 120 mm m

Consultation ¹⁾
QuickCurtain
(separate from order)

1) Attention:
longer delivery times!

Special lengths on request from the contractual partner