


☐ Enquiry ☐ Order

Reference no. (Customer)

Customer no.:		Order address:	
Customer:			
Contact person:		Delivery address:	
Telephone:			
E-mail:		Requested delivery date:	

Edscha TS Compact Roof – Sliding Roof

Basic roof components



☐ Compact – Sliding Roof *

Piece

Quantity of roofs with identical parameters

Standard body width: ☐ 2550 mm ☐ 2570 mm

Discrepant width, Special issue ☐ mm

Body length: mm

* Standard version in accordance with the current product description. Aluminium roof profiles are not included in the scope of delivery.

Warning! Centre stanchion required above 4600mm structure length.

Sufficient rigid stanchions are to be provided on the structure incl. stiffening e.g. by means of wallboards.

Necessary construction components for rear Components are in reference to standard body width 2550 mm

☐ Compact without rear end

Gantry beam

☐ Gantry beam BG VP (see page 13, 19)

End bow


☐ End bow (see page 13, 19)

TailWing (see page 14)

☐ TailWing VP (400-700)

☐ TailWing VP (400-900)

☐ TailWing VP (901-1200)

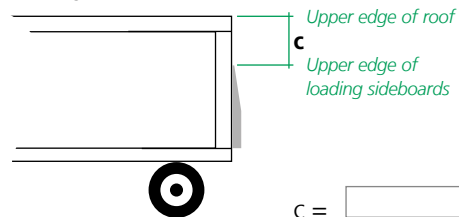

c = mm

Construction Kit TailWing ≤2600 mm mm (see page 14)

☐ TailWing VP (400-900)

☐ TailWing VP (901-1200)

Optional accessories

Side tarpaulin roller Compact (see page 22)

☐ Side tarpaulin roller with clip Piece

☐ Side tarpaulin roller without clip Piece

☐ Side tarpaulin roller SPR-4 Piece

☐ Rope-chock-locking Piece

☐ End carriage Standard Piece

☐ Aluminum profile 5m Piece

☐ Aluminum profile 8m Piece

Stanchion roller carrier (see page 22)

☐ Stanchion roller carrier CS 125 / CS 175 Piece

Profile seal Standard//Universal (see page 22)

☐ grey ☐ 13700 x 125 mm Roll Piece

☐ black ☐ 18500 x 125 mm Roll Piece

Special lengths on request from the contractual partner

☐ Enquiry ☐ Order

Reference no. (Customer)

Customer no.:

Order address:

Customer:

Contact person:

Delivery address:


Telephone:

E-mail:

Requested delivery date:

Edscha TS Compact Roof – Fixed Roof

Basic roof components



☐ Compact – fixed roof *

Piece

Quantity of roofs with identical parameters

Standard

body width: ☐ 2550 mm ☐ 2570 mm

Discrepant width,
Special issue

☐
 mm

Body length:

 m

* Standard version in accordance with the current product description. Aluminium roof profiles are not included in the scope of delivery.

Warning! Centre stanchion required above 4600mm structure length.

Sufficient rigid stanchions are to be provided on the structure inl. stiffening e.g. by means of wallboards.

Necessary construction components for rear

Components are in reference to standard body width 2550 mm

☐ Compact without rear end (without roller carriage)

☐ Roller carriage

Gantry beam

☐ Gantry beam BG VP (see page 13, 19)

☐ Gantry beam BG VP (H: 130 mm)
– fixed (see page 19)

End bow

☐ End bow (see page 13, 19)

☐ Closing bow – fixed (see page 19)


☐ Gantry beam fixation

TailWing (see page 20)

☐ TailWing VP (400-700)

☐ TailWing VP (400-900)

☐ TailWing VP (901-1200)

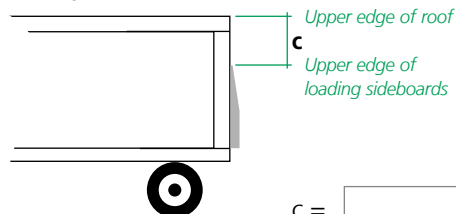

c = mm

Construction Kit TailWing ≤2600 mm mm (see page 20)

☐ TailWing VP (400-900)

☐ TailWing VP (901-1200)

Optional accessories

Side tarpaulin roller Compact (see page 22)

☐ Side tarpaulin roller with clip Piece

☐ Side tarpaulin roller without clip Piece

☐ Side tarpaulin roller SPR-4 Piece

☐ Rope-chock-locking Piece

☐ End carriage Standard Piece

☐ Aluminum profile 5m Piece

☐ Aluminum profile 8m Piece

☐ Tie rod

Stanchion roller carrier (see page 22)

☐ Stanchion roller carrier CS 125 / CS 175 Piece

Profile seal Standard//Universal (see page 22)

☐ grey ☐ 13700 x 125 mm Roll Piece

☐ black ☐ 18500 x 125 mm Roll Piece

Special lengths on request from the contractual partner